

## DESCRIPTION

The City Tie Replacement Door is a replacement for an existing Notifier™ Class 1/2 Chicago Building Code Panel Door. It is a complete replacement that eliminates the AC source wiring, which is no longer required and fits on the existing enclosure. A new terminal strip mounted on a metal plate is provided and installs with self tapping screws into the existing backbox. A lock is not included as the lock can be removed from existing door and re-installed in the new door.


The City Tie Replacement Door combines three (3) separate switch assemblies in one complete panel to simplify installation and wiring near the Fire Alarm Panel.

The City Tie Replacement Door is used to disconnect the Fire Alarm Panel from reporting any Alarm or Trouble condition to the city in order to test and maintain the Fire Alarm System. When the switch is turned to the DISCONNECTED position, a white pilot light illuminates which informs the user that the Panel has been disconnected. The City Tie Trouble Bell will ring and can be silenced using the City Tie Trouble Station to the right of the Disconnect Switch.

Both the Fire Alarm Trouble and City Tie Trouble Stations work the same way. In the "BELL NORMAL" position, the "BELL TEST" will sound the bell. When there is a trouble, the bell will sound. Switching the toggle to the "BELL SILENCE" position will silence the bell and the "BELL SILENCED" LED will illuminate. When the trouble clears, the LED will turn off and a ring back will sound until the "BELL SILENCE" switch is returned to the normal position.



The City Tie Disconnect Panel operates on 24VDC. It comes wired with a negative common, positive is available upon request. The panel can also have a module used to disconnect the City Tie if requested.


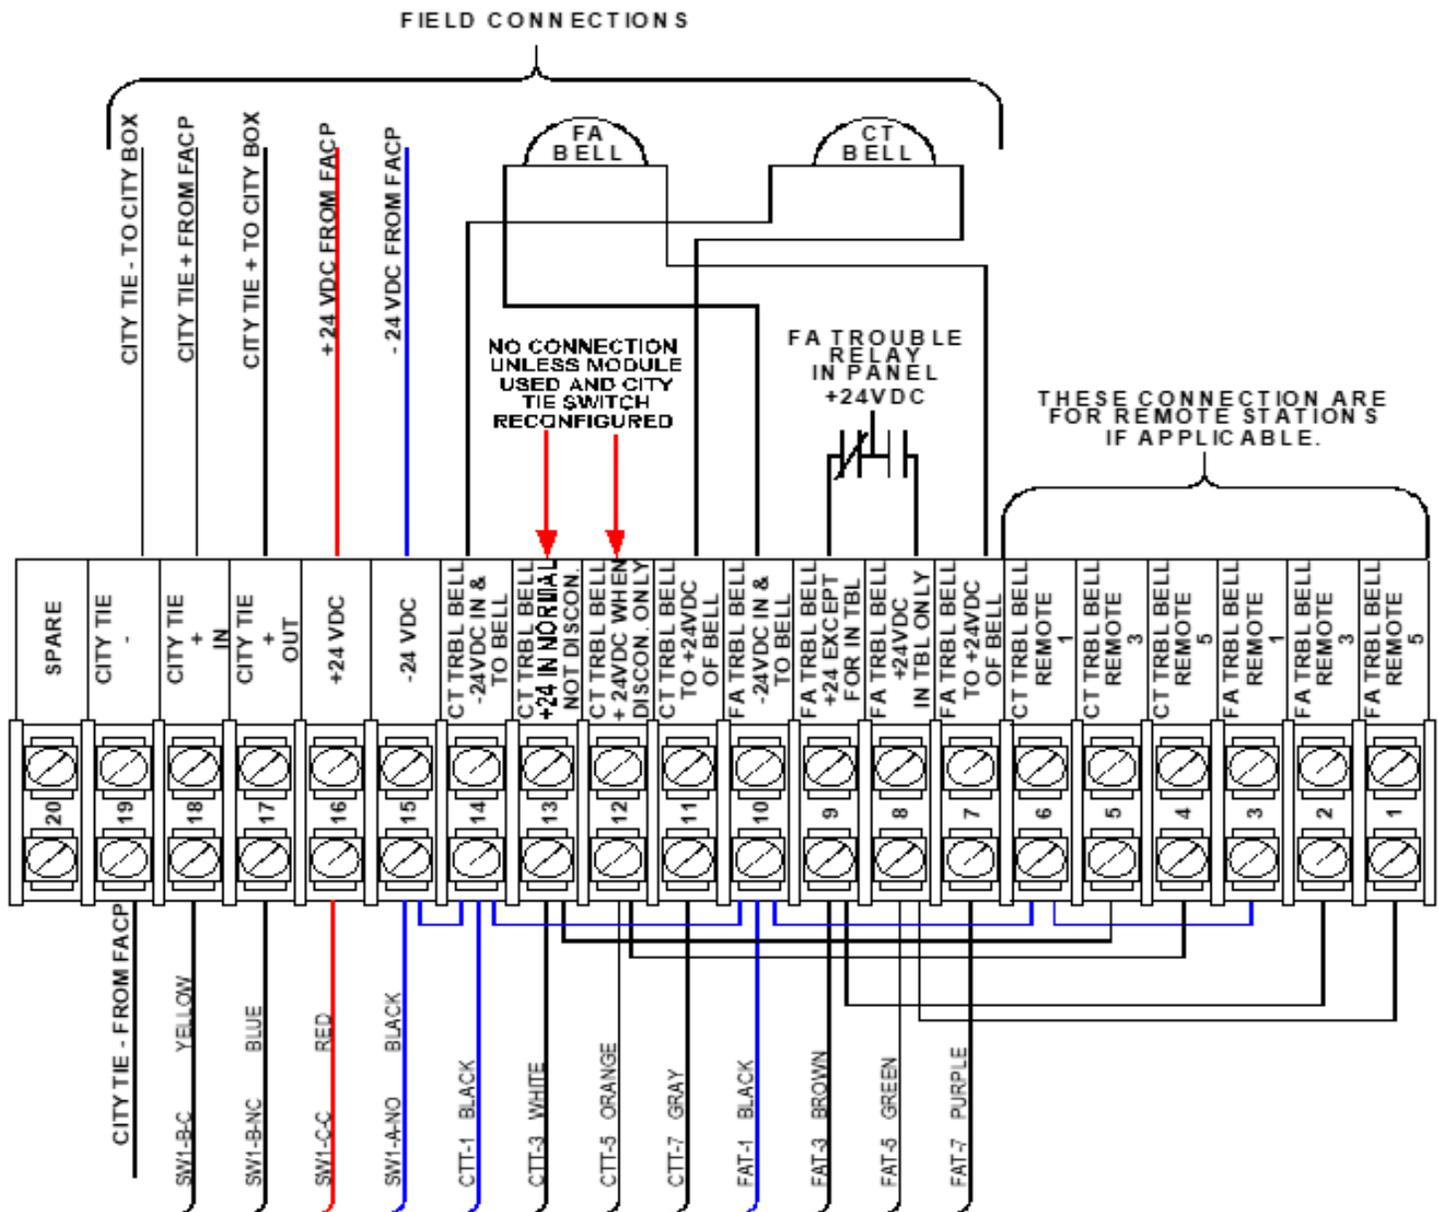





# CITY TIE REPLACEMENT DOOR

PART#: **GEM CBC-DC-RP-KIT** · Negative Common

FRONT VIEW

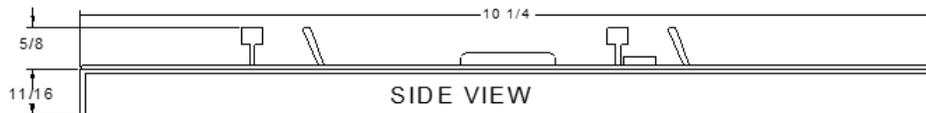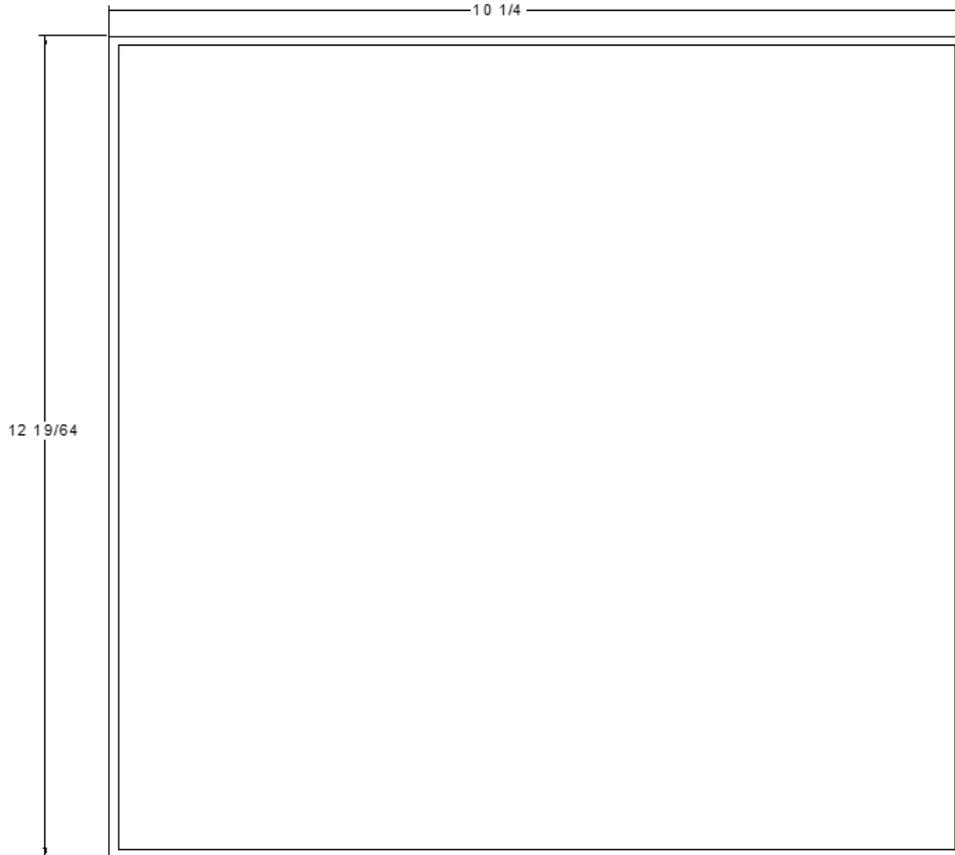

SIDE VIEW

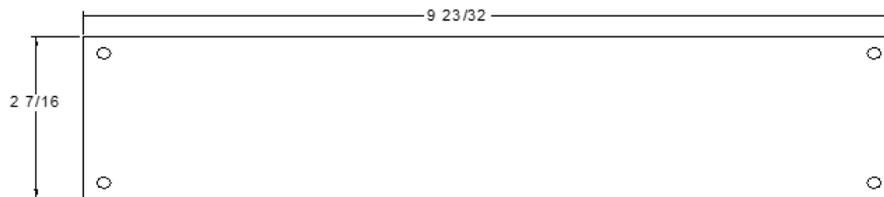

FRONT VIEW BACKPLATE

This literature is provided for informational purposes only. Gemcom, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact GEMCOM, INC., WILLOW SPRINGS, IL 60480. Telephone: (708) 839-6840

